

Wall flue

5DB69255

EG018410



Additional accessories available

Activated carbon filter


5Z 9102X1

EG18911

Stainless steel metallic grease filter

5Z 9203X1

EG18541

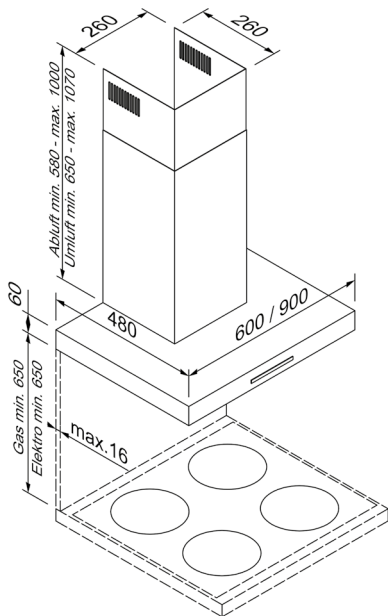

Design	
Colour	Black matt
Construction type	Box design
Width (in cm)	90

Operating modes & power	
Extraction mode / circulation mode	• / •
Fan efficiency class	A
Light efficiency class	A
Grease filter efficiency class	C
Extraction capacity max. normal / intensive level ¹	560m³/h / 632m³/h
Circulation capacity max. normal / intensive level ¹	394m³/h / 445m³/h
Noise level (in dB {A}) normal level max. extract air ²	62

Operating comfort & equipment	
Operation	Touch Control
Lighting	2 × 2,7 W LED
Power levels	3 + 1 Intensive level
Intensive levels with automatic reset	•
Multi Control	•
Filter saturation indicator	–

Accessories included**	
Accessories included	Metal grease filter, dishwasher-safe

Technical data	
Energy efficiency class	A
Connected load	225W / 200-240 V
Fuse protection (in A)	10 A
Frequency (in Hz)	50-60 Hz
Plug type	Type F
Length of connection cable (in cm)	150 cm
Net weight (in KG)	13,2 kg
Gross weight (in KG)	16,14 kg
Dimensions of the packaged appliance (H × W × D)	101,0 x 39,0 x 60,0 cm
Appliance dimensions, extraction (H × W × D)	64,0 - 106,0 x 90,0 x 48,0 cm
Appliance dimensions, circulation (H × W × D)	71,0 x 113,0 x 90,0 x 48,0 cm
EAN	4251003111378

Note	
Note	

¹ Standards for fan capacity according to EN 61591.
² Standards for sound pressure according to EN 60704-2-13.
In a range from: A+++ to D.